


2208/2

EN Ribbed driver pulley puller


SLO Snemalec narebrenih jermenic




 **UNIOR**<sup>®</sup>

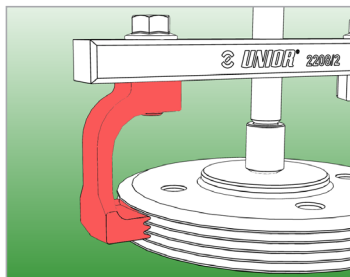


**Disassembly of driver pulley with ribbed jaws •**  
Demontaža jermenice z snemalno šapo z ozobjem

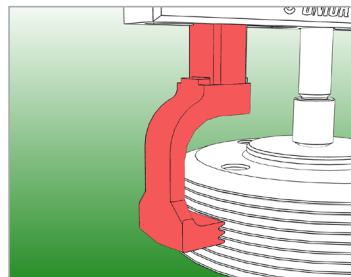

**Disassembly of double height driver pulley with ribbed jaws and additional extensions •**  
Demontaža dvojne debeline jermenice z snemalno šapo z ozobjem ter nastavkom

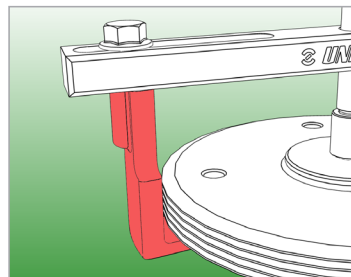


**Disassembly of driver pulley with hook jaw •**  
Demontaža jermenice z snemalnim kavljem

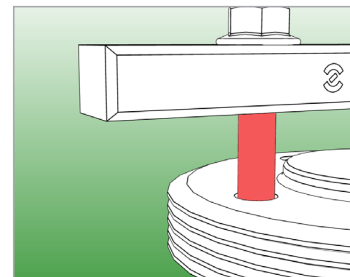


**Disassembly of driver pulley with two M10 screws •** Demontaža jermenice s pomočjo dveh vijakov M10

#### RIBBED PULLEY DIMENSIONS

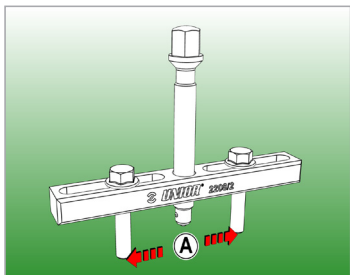


**SHORT BEAM, min. A = Ø40mm, max. A = Ø160mm**  
**LONG BEAM, min. A = Ø90mm, max. A = Ø240mm**

KRATKA glava, min. A = Ø40mm, max. A = Ø160mm  
DOLGA glava, min. A = Ø90mm, max. A = Ø240mm

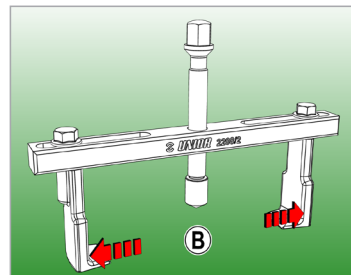


**SHORT BEAM, min. B = Ø38mm, max. B = Ø130mm**  
**LONG BEAM, min. B = Ø90mm, max. B = Ø205mm**

KRATKA glava, min. B = Ø38mm, max. B = Ø130mm  
DOLGA glava, min. B = Ø90mm, max. B = Ø205mm

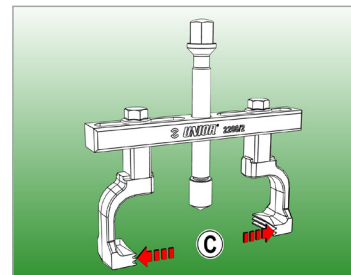

**SHORT BEAM, min. C = Ø75mm, max. C = Ø150mm**  
**LONG BEAM, min. C = Ø125mm, max. C = Ø240mm**

KRATKA glava, min. C = Ø75mm, max. C = Ø150mm  
DOLGA glava, min. C = Ø125mm, max. C = Ø240mm

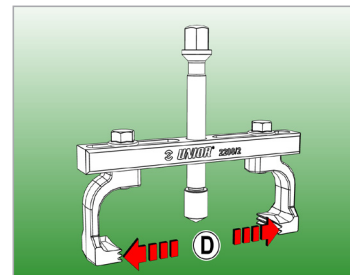

**SHORT BEAM, min. D = Ø75mm, max. D = Ø150mm**  
**LONG BEAM, min. D = Ø125mm, max. D = Ø240mm**

KRATKA glava, min. D = Ø75mm, max. D = Ø150mm  
DOLGA glava, min. D = Ø125mm, max. D = Ø240mm

UNIOR d.d.  
Kovaška cesta 10  
3214 Zreče  
SLOVENIJA

tel.: +386 (0) 3 757 81 00

fax: +386 (0) 3 576 26 43

email: sales@unior.si

[www.unior.com](http://www.unior.com)