2208/2

EN Ribbed driver pulley puller

SLO Snemalec narebrenih jermenic

UNIOR®

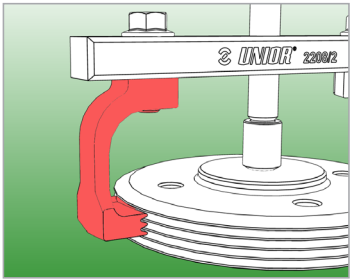

Disassembly of driver pulley with ribbed jaws • Demontaža jermenice z snemalno šapo z ozobjem

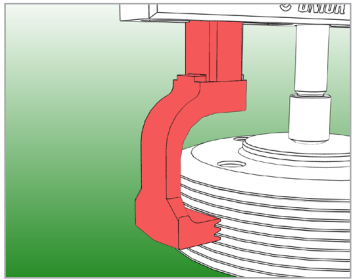

Disassembly of double height driver pulley with ribbed jaws and additional extensions • Demontaža dvojne debeline jermenice z snemalno šapo z ozobjem ter nastavkom

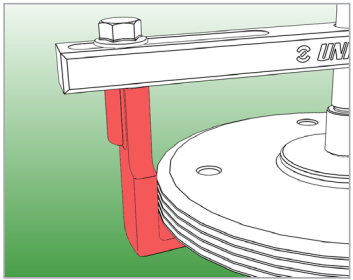

Disassembly of driver pulley with hook jaw • Demontaža jermenice z snemalnim kavljem

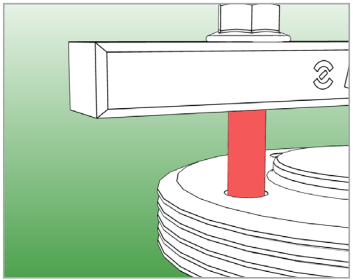

Disassembly of driver pulley with two M10 screws • Demontaža jermenice s pomočjo dveh vijakov M10

RIBBED PULLEY DIMENSIONS

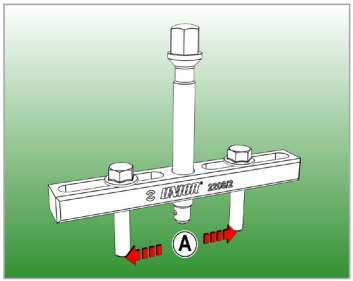

SHORT BEAM, min. A = Ø40mm, max. A = Ø160mm
LONG BEAM, min. A = Ø90mm, max. A = Ø240mm

KRATKA glava, min. A = Ø40mm, max. A = Ø160mm
DOLGA glava, min. A = Ø90mm, max. A = Ø240mm

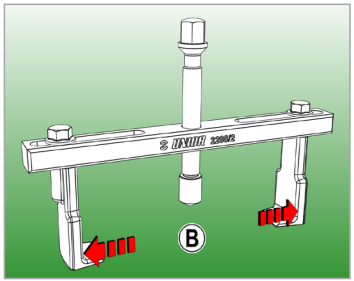

SHORT BEAM, min. B = Ø38mm, max. B = Ø130mm
LONG BEAM, min. B = Ø90mm, max. B = Ø205mm

KRATKA glava, min. B = Ø38mm, max. B = Ø130mm
DOLGA glava, min. B = Ø90mm, max. B = Ø205mm

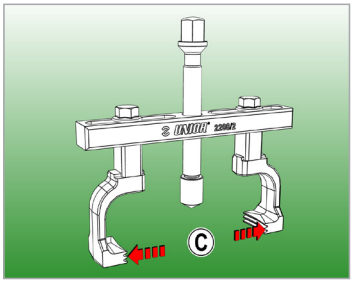

SHORT BEAM, min. C = Ø75mm, max. C = Ø150mm
LONG BEAM, min. C = Ø125mm, max. C = Ø240mm

KRATKA glava, min. C = Ø75mm, max. C = Ø150mm
DOLGA glava, min. C = Ø125mm, max. C = Ø240mm

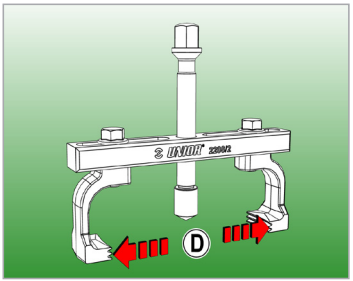

SHORT BEAM, min. D = Ø75mm, max. D = Ø150mm
LONG BEAM, min. D = Ø125mm, max. D = Ø240mm

KRATKA glava, min. D = Ø75mm, max. D = Ø150mm
DOLGA glava, min. D = Ø125mm, max. D = Ø240mm

UNIOR d.d.
Kovaška cesta 10
3214 Zreče
SLOVENIJA

tel.: +386 (0) 3 757 81 00
fax: +386 (0) 3 576 26 43
email: sales@unior.si
www.uniortools.com