

# Alicate corte diagonal reforzado

466/1BI



## Perfiles




## Normas

DIN ISO 5749

## Características del producto

- Material: composición especial para temple y endurecimiento
- totalmente templado y revenido
- filos templados por inducción
- cabezas pulidas
- acabado: cromado según ISO 1456:2009
- mangos en doble componente para trabajos duros
- fabricada totalmente de acuerdo con ISO 5749

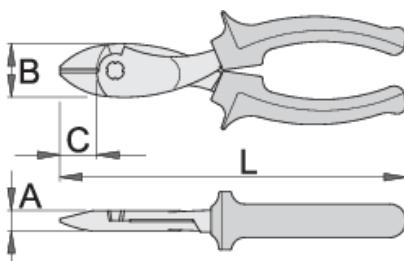

	L	B	A	C	
617686	160	23.5	10	20.5	214
608850	180	28	11	20	313
608837	200	27	11	21	344

capacidad de corte ( 10N=1Kg)

	L	max 2150 N/mm <sup>2</sup> Ø†	max 650 N/mm <sup>2</sup> Ø†
617686	160	1,6	2,5
608850	180	1,8	3,0
608837	200	2,0	3,5

\* Las imágenes de los productos son simbólicos. Todas las dimensiones son en mm, peso en gramos.

## Preguntas frecuentes

**What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?**

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

**What is meant by the statement that pliers are made in accordance with the stated ISO standard?**

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.